
# RS4x2TBOB46

Scooter rack 8 spaces double-sided, T stand set in concrete 46



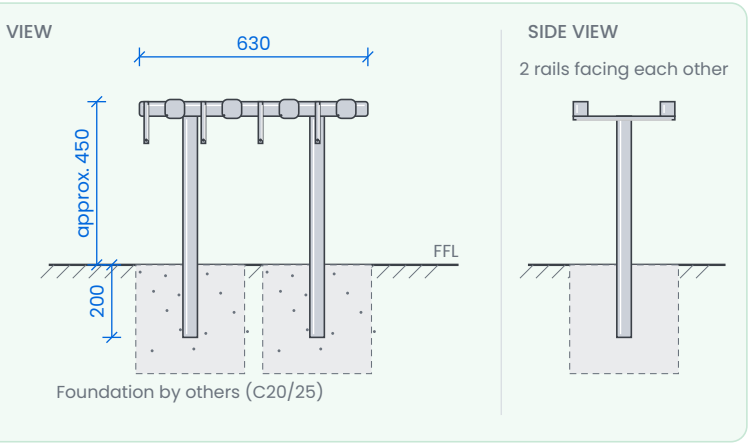


## TECHNICAL DATA

| | |
|---|---|
| Item | **RS4x2TBOB46** |
| GTIN | 9120120490664 |
| Users | Kick scooters, children's scooters and kickboards |
| Parking spaces | 8 (double-sided) |
| Length | 630 mm |
| Mounting height | approx. 45 cm |
| Space opening | approx. 50 × 48 mm |
| Fixing | 2 × T floor stand for setting in concrete 46 |
| Material | Steel, hot-dip galvanised to DIN EN ISO 1461 |
| Weight | 8.6 kg |

## SHORT TEXT

**Scooter rack 8 spaces double-sided, T stand set in concrete 46**

## LONG TEXT · UNIT PCS

Scooter rack for the orderly, lockable parking of kick scooters, children's scooters and kickboards. 8 parking spaces: two rails of 4 spaces each, arranged double-sided, parking position secured via the steering column. Each space with a pivoting locking bar, lockable with a standard commercial padlock (shackle Ø up to 6 mm) or the user's bicycle lock; space opening approx. 50 × 48 mm, centre-to-centre spacing 95 mm.

Steel construction, hot-dip galvanised to DIN EN ISO 1461, silver-grey finish.

Rail length 630 mm, mounting height approx. 45 cm above finished floor level.

Fixing with 2 × T floor stand 46, set in concrete (overall length 660 mm, embedment depth approx. 200 mm) in individual pad foundations or core-drilled holes. Foundations to manufacturer's instructions and structural requirements, concrete min. C20/25.

Supply as a complete kit including connecting bolts and installation instructions, and install in accordance with the manufacturer's instructions.

**Reference product: Rollerstop GmbH, Himmelpfortgasse 13/6, 1010 Wien, www.rollerstop.com, type RS4x2TBOB46 or equivalent.**

Criteria of equivalence: number and arrangement of parking spaces, individual pivoting locking bar per space, rail length, mounting height, hot-dip galvanised finish, fixing method.

Product offered: '.....'