
RS8BOB46

Scooter rack 8 spaces single-sided, set in concrete 46



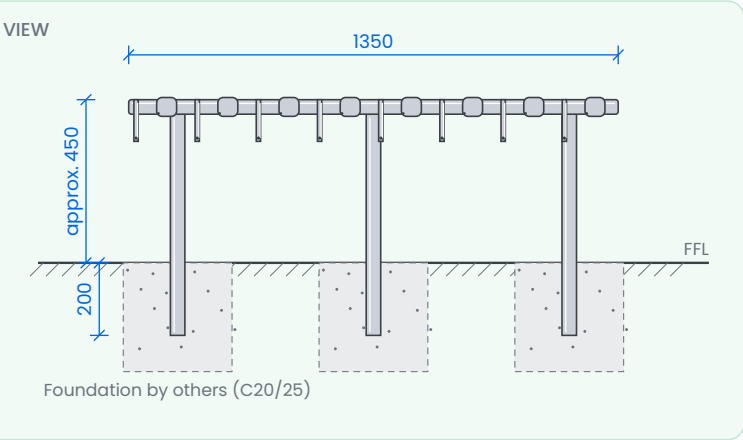

TECHNICAL DATA

Item	RS8BOB46
GTIN	9120120490619
Users	Kick scooters, children's scooters and kickboards
Parking spaces	8 (single-sided)
Length	1350 mm

Mounting height	approx. 45 cm
Space opening	approx. 50 × 48 mm
Fixing	3 × floor stand for setting in concrete 46
Material	Steel, hot-dip galvanised to DIN EN ISO 1461
Weight	9 kg

SHORT TEXT

Scooter rack 8 spaces single-sided, set in concrete 46

LONG TEXT · UNIT PCS

Scooter rack for the orderly, lockable parking of kick scooters, children's scooters and kickboards. 8 parking spaces arranged in a single-sided row, parking position secured via the steering column. Each space with a pivoting locking bar, lockable with a standard commercial padlock (shackle Ø up to 6 mm) or the user's bicycle lock; space opening approx. 50 × 48 mm, centre-to-centre spacing 95 mm.

Steel construction, hot-dip galvanised to DIN EN ISO 1461, silver-grey finish.

Rail length 1350 mm, mounting height approx. 45 cm above finished floor level.

Fixing with 3 × floor stand 46, set in concrete (square hollow section 40 × 40 mm, overall length 660 mm, embedment depth approx. 200 mm) in individual pad foundations or core-drilled holes (for asphalt base courses).

Foundations to manufacturer's instructions and structural requirements, concrete min. C20/25.

Supply as a complete kit including connecting bolts and installation instructions, and install in accordance with the manufacturer's instructions.

Reference product: Rollerstop GmbH, Himmelpfortgasse 13/6, 1010 Wien, www.rollerstop.com, type RS8BOB46 or equivalent.

Criteria of equivalence: number and arrangement of parking spaces, individual pivoting locking bar per space, rail length, mounting height, hot-dip galvanised finish, fixing method.

Product offered: '.....'