

# RS8WB16

Scooter rack 8 spaces single-sided, wall bracket 16

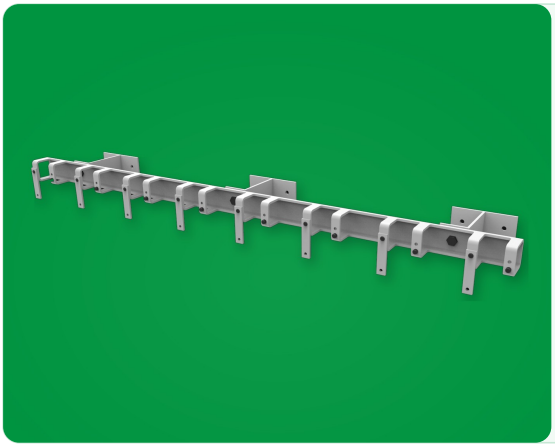

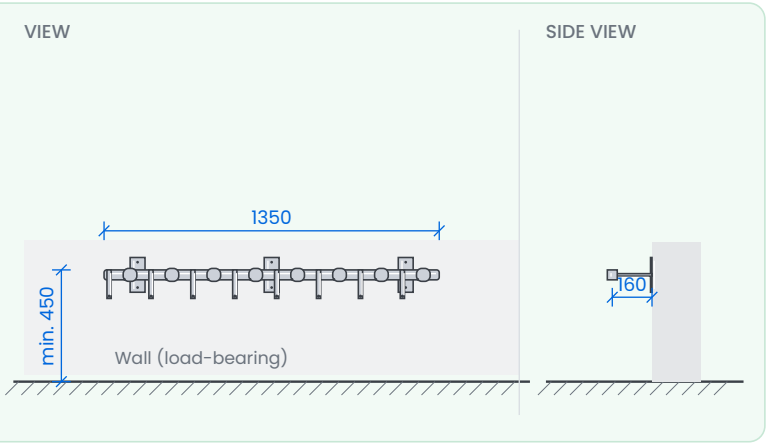


## TECHNICAL DATA

| | |
|---|---|
| Item | RS8WB16 |
| GTIN | on request |
| Users | Kick scooters, children's scooters and kickboards |
| Parking spaces | 8 (single-sided) |
| Length | 1350 mm |

| | |
|---|---|
| Mounting height | approx. 45 cm |
| Space opening | approx. 50 × 48 mm |
| Fixing | 3 × wall bracket 16 |
| Material | Steel, hot-dip galvanised to DIN EN ISO 1461 |
| Weight | – |

## SHORT TEXT

**Scooter rack 8 spaces single-sided, wall bracket 16**

## LONG TEXT · UNIT PCS

Scooter rack for the orderly, lockable parking of kick scooters, children's scooters and kickboards. 8 parking spaces arranged in a single-sided row, parking position secured via the steering column. Each space with a pivoting locking bar, lockable with a standard commercial padlock (shackle Ø up to 6 mm) or the user's bicycle lock; space opening approx. 50 × 48 mm, centre-to-centre spacing 95 mm.

Steel construction, hot-dip galvanised to DIN EN ISO 1461, silver-grey finish.

Rail length 1350 mm, mounting height approx. 45 cm above finished floor level.

Fixing with 3 × wall bracket 16 (projection from wall approx. 160 mm, mounting plate 140 × 60 mm, 2 holes Ø 11 mm per plate, hole spacing 102 mm) to a load-bearing wall (concrete or solid brick; for thermally insulated walls/ventilated façades, with threaded rods and injection mortar into the load-bearing substrate), mounting height min. 45 cm above finished floor level, including fixings.

Supply as a complete kit including connecting bolts and installation instructions, and install in accordance with the manufacturer's instructions.

**Reference product: Rollerstop GmbH, Himmelpfortgasse 13/6, 1010 Wien, www.rollerstop.com, type RS8WB16 or equivalent.**

Criteria of equivalence: number and arrangement of parking spaces, individual pivoting locking bar per space, rail length, mounting height, hot-dip galvanised finish, fixing method.

Product offered: '.....'