
eS5x2TBOB60

E-scooter rack 10 spaces double-sided, T stand set in concrete 60



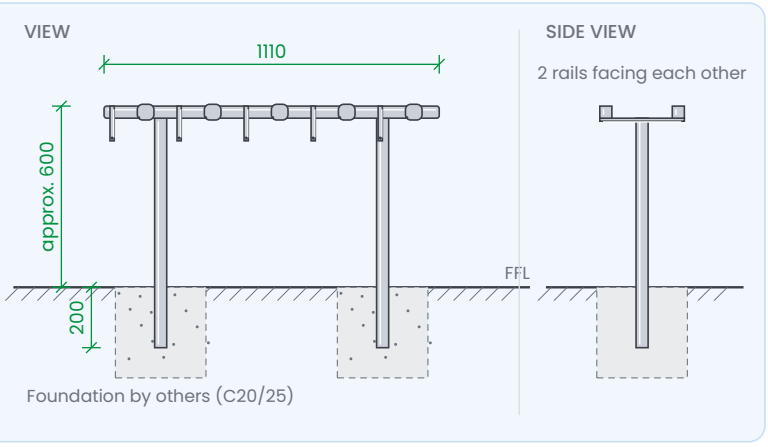

TECHNICAL DATA

Item	**eS5x2TBOB60**
GTIN	9120120490718
Users	E-scooters and kick scooters from various manufacturers
Parking spaces	10 (double-sided)
Length	1110 mm

Mounting height	approx. 60 cm
Space opening	approx. 82 × 72 mm
Fixing	2 × T floor stand for setting in concrete 60
Material	Steel, hot-dip galvanised to DIN EN ISO 1461
Weight	10.2 kg

SHORT TEXT

E-scooter rack 10 spaces double-sided, T stand set in concrete 60

LONG TEXT · UNIT PCS

E-scooter rack for the orderly, lockable parking of e-scooters and kick scooters of various makes. 10 parking spaces: two rails of 5 spaces each, arranged double-sided, parking position secured via the steering column. Each space with a pivoting locking bar, lockable with a standard commercial padlock (shackle Ø up to 6 mm) or the user's bicycle lock; space opening approx. 82 × 72 mm, centre-to-centre spacing 125 mm.

Steel construction, hot-dip galvanised to DIN EN ISO 1461, silver-grey finish.

Rail length 1110 mm, mounting height approx. 60 cm above finished floor level.

Fixing with 2 × T floor stand 60, set in concrete (overall length 800 mm, embedment depth approx. 200 mm) in individual pad foundations or core-drilled holes. Foundations to manufacturer's instructions and structural requirements, concrete min. C20/25.

Supply as a complete kit including connecting bolts and installation instructions, and install in accordance with the manufacturer's instructions.

Reference product: Rollerstop GmbH, Himmelpfortgasse 13/6, 1010 Wien, www.rollerstop.com, type eS5x2TBOB60 or equivalent.

Criteria of equivalence: number and arrangement of parking spaces, individual pivoting locking bar per space, rail length, mounting height, hot-dip galvanised finish, fixing method.

Product offered: '.....'