
# RS6BOB46

Scooter rack 6 spaces single-sided, set in concrete 46



VIEW

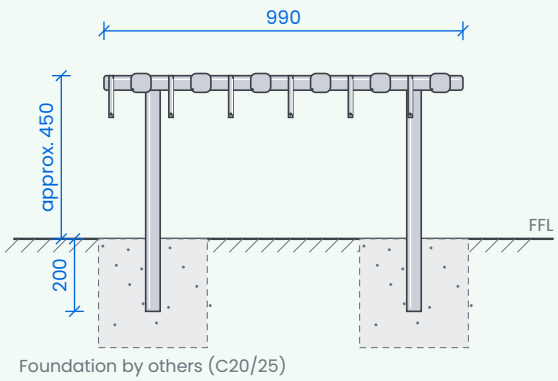


## TECHNICAL DATA

| | |
|---|---|
| Item | RS6BOB46 |
| GTIN | 9120120490633 |
| Users | Kick scooters, children's scooters and kickboards |
| Parking spaces | 6 (single-sided) |
| Length | 990 mm |

| | |
|---|---|
| Mounting height | approx. 45 cm |
| Space opening | approx. 50 × 48 mm |
| Fixing | 2 × floor stand for setting in concrete 46 |
| Material | Steel, hot-dip galvanised to DIN EN ISO 1461 |
| Weight | 6.4 kg |

## SHORT TEXT

**Scooter rack 6 spaces single-sided, set in concrete 46**

## LONG TEXT · UNIT PCS

Scooter rack for the orderly, lockable parking of kick scooters, children's scooters and kickboards. 6 parking spaces arranged in a single-sided row, parking position secured via the steering column. Each space with a pivoting locking bar, lockable with a standard commercial padlock (shackle Ø up to 6 mm) or the user's bicycle lock; space opening approx. 50 × 48 mm, centre-to-centre spacing 95 mm.

Steel construction, hot-dip galvanised to DIN EN ISO 1461, silver-grey finish.

Rail length 990 mm, mounting height approx. 45 cm above finished floor level.

Fixing with 2 × floor stand 46, set in concrete (square hollow section 40 × 40 mm, overall length 660 mm, embedment depth approx. 200 mm) in individual pad foundations or core-drilled holes (for asphalt base courses).

Foundations to manufacturer's instructions and structural requirements, concrete min. C20/25.

Supply as a complete kit including connecting bolts and installation instructions, and install in accordance with the manufacturer's instructions.

**Reference product: Rollerstop GmbH, Himmelpfortgasse 13/6, 1010 Wien, www.rollerstop.com, type RS6BOB46 or equivalent.**

Criteria of equivalence: number and arrangement of parking spaces, individual pivoting locking bar per space, rail length, mounting height, hot-dip galvanised finish, fixing method.

Product offered: '.....'