

# RS8x2TBOD46

Scooter rack 16 spaces double-sided, T floor stand 46

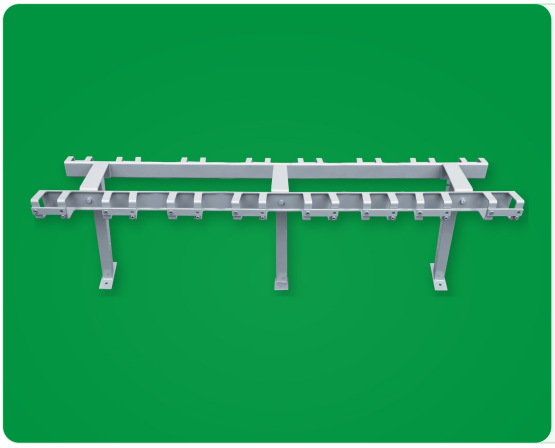

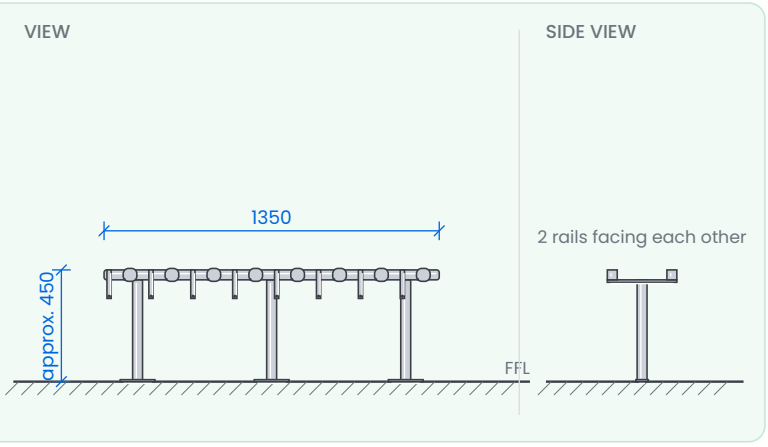


## TECHNICAL DATA

| | |
|---|---|
| Item | RS8x2TBOD46 |
| GTIN | 9120120490404 |
| Users | Kick scooters, children's scooters and kickboards |
| Parking spaces | 16 (double-sided) |
| Length | 1350 mm |

| | |
|---|---|
| Mounting height | approx. 45 cm |
| Space opening | approx. 50 × 48 mm |
| Fixing | 3 × T floor stand 46 |
| Material | Steel, hot-dip galvanised to DIN EN ISO 1461 |
| Weight | 14.8 kg |

## SHORT TEXT

**Scooter rack 16 spaces double-sided, T floor stand 46**

## LONG TEXT · UNIT PCS

Scooter rack for the orderly, lockable parking of kick scooters, children's scooters and kickboards. 16 parking spaces: two rails of 8 spaces each, arranged double-sided, parking position secured via the steering column. Each space with a pivoting locking bar, lockable with a standard commercial padlock (shackle Ø up to 6 mm) or the user's bicycle lock; space opening approx. 50 × 48 mm, centre-to-centre spacing 95 mm.

Steel construction, hot-dip galvanised to DIN EN ISO 1461, silver-grey finish.

Rail length 1350 mm, mounting height approx. 45 cm above finished floor level.

Fixing with 3 × T floor stand 46 for anchor fixing (base plate 140 × 50 mm, 2 holes Ø 11 mm per plate, hole spacing 90 mm) to a load-bearing substrate, including fixings.

Supply as a complete kit including connecting bolts and installation instructions, and install in accordance with the manufacturer's instructions.

**Reference product: Rollerstop GmbH, Himmelpfortgasse 13/6, 1010 Wien, www.rollerstop.com, type RS8x2TBOD46 or equivalent.**

Criteria of equivalence: number and arrangement of parking spaces, individual pivoting locking bar per space, rail length, mounting height, hot-dip galvanised finish, fixing method.

Product offered: '.....'