
# eS4x2BUBOD60

E-scooter rack 8 spaces double-sided, freestanding bow stand 60

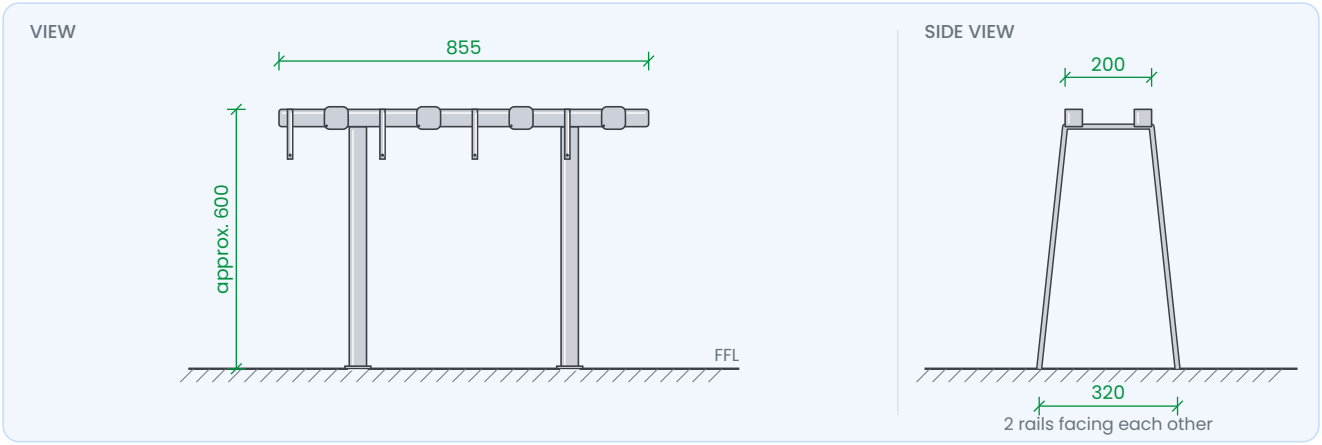


## TECHNICAL DATA

| | |
|---|---|
| Item | **eS4x2BUBOD60** |
| GTIN | 9120120490800 |
| Users | E-scooters and kick scooters from various manufacturers |
| Parking spaces | 8 (double-sided) |
| Length | 855 mm |
| Mounting height | approx. 60 cm |
| Space opening | approx. 82 × 72 mm |
| Fixing | 2 × freestanding bow stand 60 |
| Material | Steel, hot-dip galvanised to DIN EN ISO 1461 |
| Weight | 12 kg |

## SHORT TEXT

**E-scooter rack 8 spaces double-sided, freestanding bow stand 60**

## LONG TEXT · UNIT PCS

E-scooter rack for the orderly, lockable parking of e-scooters and kick scooters of various makes. 8 parking spaces: two rails of 4 spaces each, arranged double-sided, parking position secured via the steering column. Each space with a pivoting locking bar, lockable with a standard commercial padlock (shackle Ø up to 6 mm) or the user's bicycle lock; space opening approx. 82 × 72 mm, centre-to-centre spacing 125 mm.

Steel construction, hot-dip galvanised to DIN EN ISO 1461, silver-grey finish.

Rail length 855 mm, mounting height approx. 60 cm above finished floor level.

Fixing with 2 × freestanding bow stand 60, trapezoidal (width 320 mm at base, 200 mm at top), self-supporting for free placement or bolted to the substrate through 2 holes Ø 11 mm each (hole spacing 215 mm).

Supply as a complete kit including connecting bolts and installation instructions, and install in accordance with the manufacturer's instructions.

**Reference product: Rollerstop GmbH, Himmelpfortgasse 13/6, 1010 Wien, www.rollerstop.com, type eS4x2BUBOD60 or equivalent.**

Criteria of equivalence: number and arrangement of parking spaces, individual pivoting locking bar per space, rail length, mounting height, hot-dip galvanised finish, fixing method.

Product offered: '.....'